

CAT6 UTP PATCH PANEL – 24 PORTS

Hakko Opto Cat 6 24-ports UTP Patch Panel. Fixed mounted 19" 1 U high


Applications:

Hakko Opto Patch Panels are designed for use on standard 19-inch racks and cabinets. The patch panels installed with 24 x Cat 6 connectors, and equipped with cable management bar at the rear. The Cat 6 system is designed for use in high megabit applications such as Gigabit Ethernet.



Dimension:

1U – 44.5*482.6*66.5 mm (H*W*D)

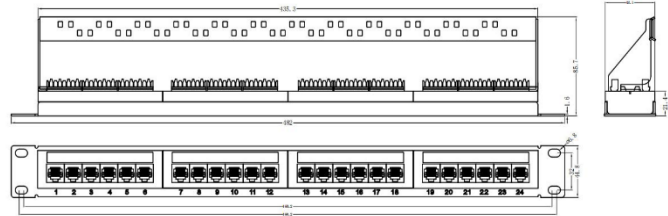

Specification for Cat6 UTP Patch Panel :

Electrical	Voltage Rating : 125 VAC RMS
	Current Rating : 1.300 A
	Contact Resistance : 100 Millions MAX.
	Insulation Resistance : 500 M-Ohm Minimum
	Dielectric Strength : 1,000 V RMS @ 60 Hz for 1 minute (Signals to Ground)
Environmental	Storage : 40°C To +70°C
	Operation : 10°C To +60°C
Mechanical	Housing Material : Steel
	Panel Frame : Carbon Steel, Powder Coating in black color
	Management Bar : Steel
	Contact : Phosphor Bronze with Nickel Plating